



Akiki Engineering Est.

Water & Steam Experts



1.4. Reverse Osmosis Catalogue

October 7, 2010

Contents

Commercial AE 25 Series	3
Commercial AE 40 Series	5
Commercial AE 80 Series	7
Sea Water Series	9

Commercial AE 25 Series



Applications:

- Humidification
- Kidney Dialysis
- Animal Feed
- Hatcheries
- Greenhouses
- Wastewater Treatment
- Boiler Water
- Battery Water
- Semiconductor production
- Hemodialysis

Design Parameters

- Based upon feed water: SDI \leq 3, 1000 ppm TDS, pH 2-11 and temperature 380F to 950F.

Package Features

- 2.5" x 40" low-energy TFC membranes, FILMTEC LP-2540
- FRP membrane housing
- Vertical Centrifugal High Pressure Pump
- Polypropylene 5 - micron cartridge filter (1/2")
- 24 volt operation for all controls, switches, and solenoid valves
- SS 304 stainless steel skid
- Pretreatment lockout
- Low pressure switch
- Product & Concentrate flow meters
- Product TDS meter
- Automatic Concentrate flush
- Prefilter, Pump Discharge & Concentrate Pressure gauges
- Sample valves for each membrane housing
- Polypropylene face piping

Pretreatment Options:

- The RO feed water must be pretreated in order to prevent membrane damage and/or fouling. Proper pretreatment is essential for reliable operation of any RO system.
- Pretreatment requirements vary depending on the nature of the feed water. Pretreatment equipment is sold separately. The most common forms of pretreatment are Media Filter, Water Softener, Carbon Filter, Chemical Injection.
- Optional: Up to 80

Operating Specifications:

- Prefilter (5 micron cartridge): 10"
- Electrical Requirement: 380 V / 50 HZ / 3 pH

Commercial AE 40 Series



Applications:

- Humidification
- Kidney Dialysis
- Animal Feed
- Hatcheries
- Greenhouses
- Wastewater Treatment
- Boiler Water
- Battery Water
- Semiconductor production
- Hemodialysis

Design Parameters

- Based upon feed water: SDI \leq 3, 1000 ppm TDS, pH 8 and temperature 25C.

Package Features

- 4" x 40" low-energy TFC membranes, FILMTEC TW30 - 4040
- FRP Pressure Vessels
- Stainless Steel Panel
- Vertical Centrifugal High Pressure Pump
- Polypropylene 5 - micron cartridge filter (1")
- 24 volt operation for all controls, switches, and solenoid valves
- SS 304 stainless steel skid
- Pretreatment lockout
- Low pressure switch
- Product & Concentrate flow meters
- Product TDS meter
- Automatic Concentrate flush
- Prefilter, Pump Discharge & Concentrate Pressure gauges
- Sample valves for each membrane housing
- Polypropylene face piping

Pretreatment Options:

- The RO feed water must be pretreated in order to prevent membrane damage and/or fouling. Proper pretreatment is essential for reliable operation of any RO system.
- Pretreatment requirements vary depending on the nature of the feed water. Pretreatment equipment is sold separately. The most common forms of pretreatment are Media Filter, Water Softener, Carbon Filter, Chemical Injection.

Operating Specifications:

- Prefilter (5 micron cartridge): 20" BB
- Electrical Requirement: 380 V / 50 HZ / 3 pH

Commercial AE 80 Series



Pretreatment Options:

- The RO feed water must be pretreated in order to prevent membrane damage and/or fouling. Proper pretreatment is essential for reliable operation of any RO system.
- Pretreatment requirements vary depending on the nature of the feed water. Pretreatment equipment is sold separately. The most common forms of pretreatment are Media Filter, Water Softener, Carbon Filter, Chemical Injection.

Operating Specifications:

- Electrical Requirement: 380 V / 50 HZ / 3 pH

Applications:

- Humidification
- Kidney Dialysis
- Animal Feed
- Hatcheries
- Greenhouses
- Wastewater Treatment
- Boiler Water
- Battery Water
- Semiconductor production
- Hemodialysis


Design Parameters

- Based upon feed water: SDI \leq 3, 2000 ppm TDS, pH 4 - 11 and temperature 20C.

Package Features

- 8" x 40" low-energy TFC membranes, FILMTEC BW30LE - 4040
- FRP Pressure Vessels
- Stainless Steel Panel
- Vertical Centrifugal High Pressure Pump
- SS 304 housing 5 micron cartridge filter (1")
- 24 volt operation for all controls, switches, and solenoid valves
- SS 304 stainless steel skid
- Pretreatment lockout
- Low pressure switch
- Product & Concentrate flow meters
- Product TDS meter
- Automatic Concentrate flush
- Prefilter, Pump Discharge & Concentrate Pressure gauges
- Sample valves for each membrane housing
- Polypropylene face piping

Sea Water Series

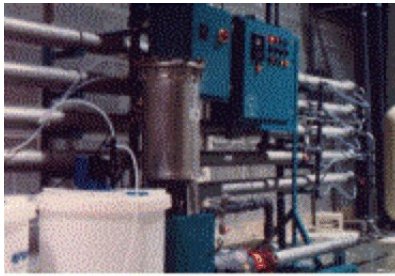

35,000 gpd System With Level
Control and Pump Controls

Sea Water RO Systems are a reversal of the natural process of osmosis: a process by which a dilute, or lighter solution passes spontaneously through a semi-porous membrane into a more concentrated solution. For example, fresh water will flow through an osmotic membrane to mix with heavier brackish or sea water solution. In reverse osmosis, this process is reversed by applying external pressure to the saline solution, through the membrane into the pure water side if the external pressure applied to the saline solution exceeds the osmotic pressure.

Akiki Engineering Sea Water Commercial Reverse Osmosis are available with capacities ranging from 1 m³/day to 30 m³/day and from 70 m³/day to 420 m³/day. These systems can be ordered as completely assembled or unassembled.

Applications:

- Humidification
- Kidney Dialysis
- Animal Feed
- Hatcheries
- Greenhouses
- Wastewater Treatment
- Boiler Water
- Battery Water
- Semiconductor production
- Hemodialysis

Options:

- Feed and/or Product pH/ORP Controller
- R/O systems are designed with complete pretreatment units by Akiki Engineering
- System design for special applications
- Pre-treatment systems

Features:

- Stainless Steel Skid
- Pressure relief valve & pulsation dampener
- PVC coated stainless steel or cartridge filter housing
- Electric actuated butterfly valve
- Stainless steel high pressure piping
- PVC low pressure piping
- Sample valves for each membrane housing
- Low & high pressure switch
- Product & Concentrate flow meters
- Pressure gauges

Features:

- TFC spiral wound sea water membranes, 2.5" / 4" / 8" :Dx40" :L
- FRP membrane housing with 1000 psi max operating pressure
- Stainless steel globe valve on concentrated line for plunger type pumps and on concentrated and feed lines for centrifugal pumps
- Auto flushing system contains stainless, steel pump, polyethylene fresh water tank, level switches, automatic valves and skid
- Product conductivity controller
- Product TDS controller